


# X axis | 240A5

# **Amplified Piezo Actuators**

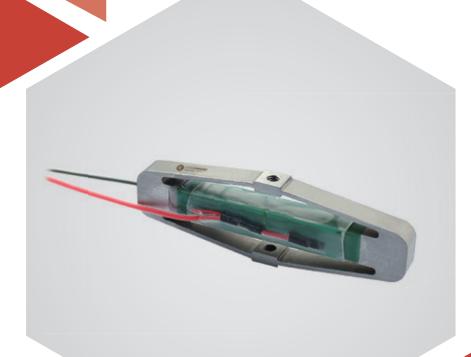

# Introduction

The amplified piezo actuator is an actuator that amplifies and outputs the displacement generated by low-voltage piezo stacks preloaded by a mechanical amplifying structure.

The amplified structure is an mechanical shell, and its material is generally steel. In addition to providing optimized pre-tightening force for piezo stacks, it also protects piezo stacks from tensile forces that can cause irreversible or even fatal damage to piezo stacks.

#### Characteristics >>

- X Contraction
- Displacement to 240µm
- Blocking force to 12N
- Unloaded resonant frequency to 600Hz
- · Nanoscale resolution

#### Applications >>

- · Probe scanning
- · Fiber stretching
- Micro-scanning
- · Optical mirrors positioning
- Diamond turning
- · laser cavity tuning
- Flow measurement technology
  Inkjet technology





### Technical Data >>

Туре	240A5	Units
Active axes	Х	
Travel range	240	μm±20%
Blocking force	12	N
Unloaded resonant frequency	600	Hz±20%
Stiffness	0.05	N/µm±20%
El. capacitance	3.6	μF±20%
Operating temperature <sup>[1]</sup>	-20~80	°C
Material	Steel	
Sensor	optional	
Cable length <sup>[2]</sup>	0.15	m±10mm
Voltage connector <sup>[2]</sup>	Bare wire	


Note: Max driving voltage could be -20V $\sim$ 150V, 0 $\sim$ 120V is recommended for long-term and high-reliable operation.Unless otherwise specified, the above parameters are measured at room temperature about 25° C.

- $\label{eq:custom} \mbox{[1] Custom ultralow temperature and ultrahigh vacuum versions are available.}$
- [2] Custom cable length and connector is available.


Note: The parameters mentioned above are related to the test environment and test equipment.


# Principle >>


Piezo stacks produce deformation and displacement along the main axis, that is, the long axis direction, and the elliptical mechanical structure amplifies and outputs the displacement along the short axis direction.

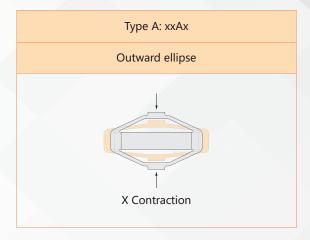

### Drawing >>







# Recommended Controllers >>



E01.C1 LCD, membrane button, up to 625mA RS-232/RS-422/USB interface Software secondary development



E53.C Small size, 60mA RS-232/RS-422/USB interface Software secondary development