

## X axis | 80A14

### Amplified Piezo Actuators



#### Characteristics >>

- X Contraction
- Travel to 105μm
- Blocking force to 1000N
- Unloaded resonant frequency to 1700Hz
- Nanoscale resolution

#### Applications >>

- Probe scanning
- Fiber stretching
- Micro-scanning
- Flow measurement technology
- Optical mirrors positioning
- Diamond turning
- laser cavity tuning
- Inkjet technology

## Introduction

The amplified piezo actuator is an actuator that amplifies and outputs the displacement generated by low-voltage piezo stacks preloaded by a mechanical amplifying structure.

The amplified structure is a mechanical shell, and its material is generally steel. In addition to providing optimized pre-tightening force for piezo stacks, it also protects piezo stacks from tensile forces that can cause irreversible or even fatal damage to piezo stacks.



**Harbin Core Tomorrow Science & Technology Co., Ltd.**

Tel: +86-451-86268790

Email: [info@coremorrow.com](mailto:info@coremorrow.com)

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin

Fax: +86-451-86267847

Web: [www.coremorrow.com](http://www.coremorrow.com)

Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai

## Technical Data >>

Type	80A14	Units
Active axes	X	
Travel range	105	$\mu\text{m} \pm 20\%$
Blocking force	1000	N
Unloaded resonant frequency	1700	$\text{Hz} \pm 20\%$
Stiffness	13	$\text{N}/\mu\text{m} \pm 20\%$
El. capacitance	44	$\mu\text{F} \pm 20\%$
Operating temperature <sup>[1]</sup>	-20~80	°C
Material	Steel	
Sensor	optional	
Cable length <sup>[2]</sup>	0.15	$\text{m} \pm 10\text{mm}$
Voltage connector <sup>[2]</sup>	Bare wire	

Note: Max driving voltage could be -20V~150V, 0~120V is recommended for long-term and high-reliable operation. Unless otherwise specified, the above parameters are measured at room temperature about 25° C.


[1] Custom ultralow temperature and ultrahigh vacuum versions are available.

[2] Custom cable length and connector is available.


Note: The parameters mentioned above are related to the test environment and test equipment.

## Principle >>

Piezo stacks produce deformation and displacement along the main axis, that is, the long axis direction, and the elliptical mechanical structure amplifies and outputs the displacement along the short axis direction.

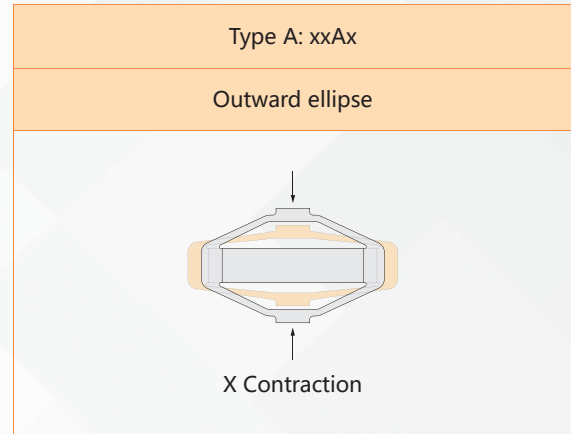

## Drawing >>

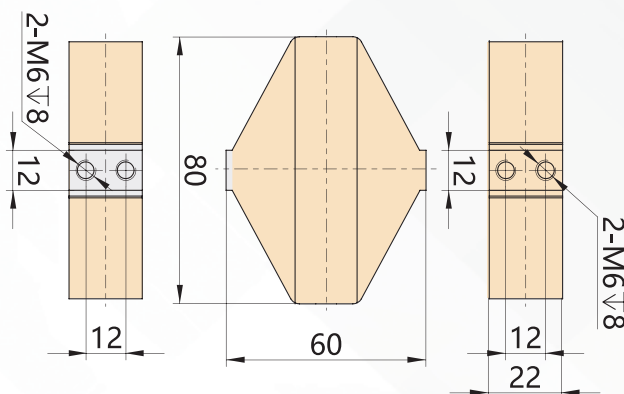

## Recommended Controllers >>



**E01.C1**  
 LCD, membrane button, up to 625mA  
 RS-232/RS-422/USB interface  
 Software secondary development



**E53.C**  
 Small size, 60mA  
 RS-232/RS-422/USB interface  
 Software secondary development



**Harbin Core Tomorrow Science & Technology Co., Ltd.**

Tel: +86-451-86268790 Email: info@coremorrow.com  
 Fax: +86-451-86267847 Web: www.coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin  
 Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai