

1 Channel | E53.A1K

Piezo Amplifier



Characteristics >>

- Single channel
- Small size
- 24VDC1.5A (36W) power supply
- Easy to integration
- Open loop control

Applications >>

- Driving piezo actuator
- Driving piezo nanopositioning stage
- Driving piezo objective scanner
- Driving piezo shifter
- Driving FTS fast tool positioner
- Driving piezo scanning platform
- Driving capacitive load

Introduction

To meet the small-volume application requirements, CoreMorrow develops E53.A amplifier. It is a single-channel controller controlled by analog signals. The power supply is 24VDC/1.5A.

The body has a heat-dissipating area that conducts the heat generated.



CoreMorrow Ltd.

Tel: +86-451-86268790

Email: info@coremorrow.com

Fax: +86-451-86267847

Web: www.coremorrow.com


Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin

Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai

Technical Data >>


Type	E53.A1K
Channels	1
Analog input(V)	-1.67~10
Output voltage(V)	-20~120 (optional -20~150)
Peak current(A)	1
Ave. current(mA)	60
Bandwidth(kHz)	10
Output voltage ripple(mVpp)	10(@2.2μF)
PZT connector	ZPL.00S.250.HLN
Control input connector	SMB
Operating temperature(° C)	0~50
Output current, short-circuit(mA)	60
Overcurrent indicator	Lights when output ave. current > 60mA
Static power(W)	1.8
Size(mm) (L×H×D)	85×27.5×80
Mass(kg)	0.24
Power supply	24V(20~30V)DC1.5A(36W)

Curves >>

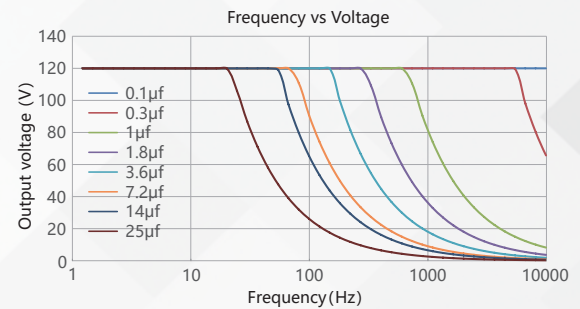


Disclaimer: The data here are typical, only for reference. Some variations will occur for different batch.


Panel Introduction >>

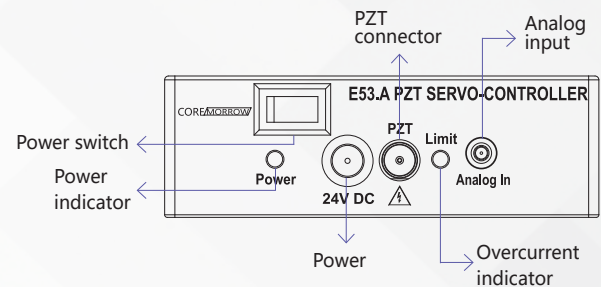

Drawing >>

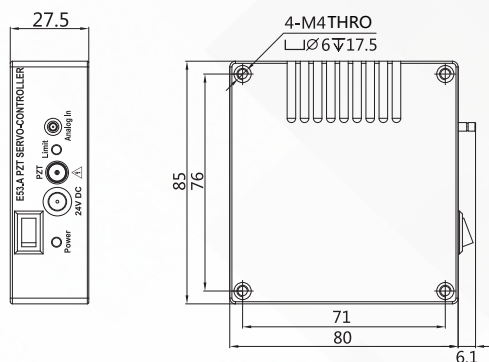

Driving Principle >>

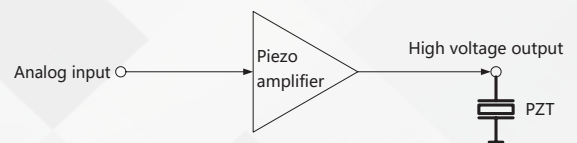

CoreMorrow Ltd.

Tel: +86-451-86268790

Fax: +86-451-86267847

Email: info@coremorrow.com

Web: www.coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin

Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai