

2 Channels | E70.D2S/C2K-H Piezo Controller



Introduction

The E70.D2S/C2K-H piezoelectric controller is a two-channel piezoelectric controller designed based on the standard E70 piezoelectric controller. It can carry out digital communication through serial port, USB.

Characteristics >>

- 2 channels output
- Digital and analog piezo controller
- High bandwidth
- Low ripple, servo control

Applications >>

- Driving piezo actuator
- Driving piezo nanopositioning stage
- Driving piezo objective scanner
- Driving piezo shifter
- Driving FTS fast tool positioner
- Driving piezo scanning platform
- Driving capacitive load



Harbin Core Tomorrow Science & Technology Co., Ltd.

Tel: +86-451-86268790

Email: info@coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin

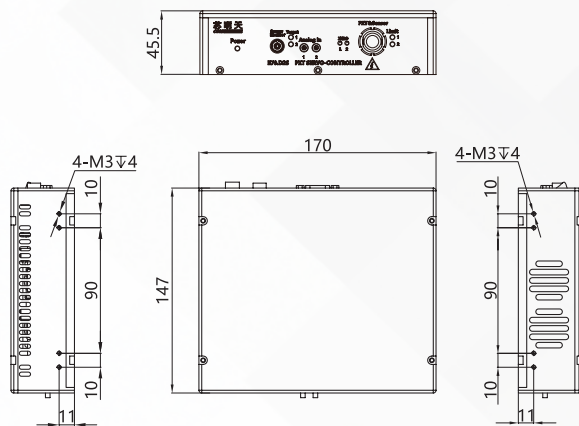
Fax: +86-451-86267847

Web: www.coremorrow.com

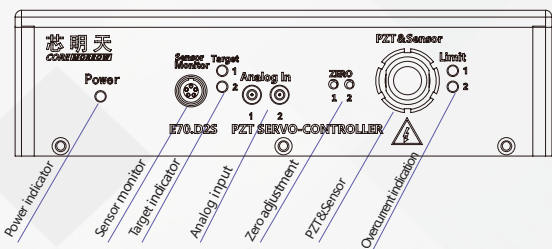
Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai

Technical Data >>

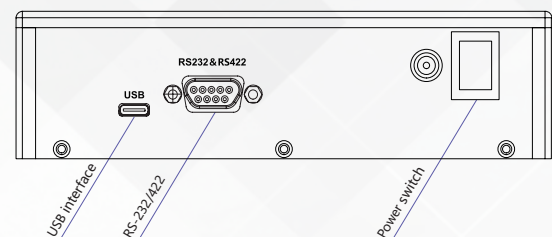
Type	E70.C2K-H	E70.D2S-H
Functions	Digital and analog piezo controller	
Channels	2	
Nominal analog input(V)	-1.67~10(±10V for constant voltage version)	
Nominal output voltage(V)	-20~120(Optional -20~100/150 and, constant voltage)	
Input power(W)	56	
Peak current(A)	1.1/channel	
Ave. current(mA)	70/channel	
Bandwidth(Hz)	10k/channel	
Ripple(mV)	5/channel (2.2μF)	
PZT and sensor connector	ECG.2B.312.CLV	
Control input connector	SMB	
Sensor type	-	SGS
Servo	-	PI+Low pass+Notch filter
Sensor output voltage(V)	0~10(±10V for constant voltage version)	
Sensor output connector	-	EPG.0B.304.HLN
Sensor output ripple(mV)	-	10
Communication	RS-232/422(DB9), USB-B,Ethernet	
Baud rate	9600、38400、57600、115200	
Settable baud rate for software secondary development	9600、19200、38400、57600、76800、115200、128000、230400、256000	
PC software control function	Output voltage & displacement, waveform control, setting parameters	
PC software waveform control	Programmable/standard waveform output	
Secondary development	VC++, Matlab, LabView, DLL dynamic link library functions, etc	
Operating temperature(° C)	0~50	
Over-current protection	Yes	
Static power(W)	11	
Cooling method	Fan	
Size(mm) (L×H×D)	147×170×45.5	
Mass(kg)	1.168	
Power supply	24V DC3A, DC-022B (ø2.5)	
Control way	Analog/digital signal	

Drawing >>

Panel Introduction >>

front panel



Rear panel



Note: E70.C2K-H has no servo control function.


Harbin Core Tomorrow Science & Technology Co., Ltd.

 Tel: +86-451-86268790 Email: info@coremorrow.com
 Fax: +86-451-86267847 Web: www.coremorrow.com

 Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin
 Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai