

XZ axes | P63.X18Z8S/K

Piezo Nanopositioning Stage



Introduction

P63.X18Z8S/K is small-size piezo nanopositioning stage with direct drive mechanism inside. Its important characteristics are ultra-precision and very small size, which is very easy to integrate into any scanning instrument.

Characteristics >>

- Active axes XZ
- X stroke to 18 μ m
- Z stroke to 8 μ m
- Load to 0.5kg
- Open/closed loop

Applications >>

- Nano-imprinting
- Nanoscale
- Biotechnology
- Nanometer lithography
- Optical fiber end face detection
- Micro manipulation
- Semiconductor technology
- Micro machining/precision control



Harbin Core Tomorrow Science & Technology Co., Ltd.

Tel: +86-451-86268790

Email: info@coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin

Fax: +86-451-86267847

Web: www.coremorrow.com

Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai

Technical Data >>

Type	S-Closed loop K-Open loop	P63.X18Z8S	P63.X18Z8K	Units
Active axis		XZ	XZ	
Travel range(0~120V)		X16, Z6	X16, Z6	$\mu\text{m} \pm 10\%$
Travel range(0~150V)		X18, Z8	X18, Z8	$\mu\text{m} \pm 10\%$
Sensor		SGS	-	
Resolution		X0.6, Z0.2	X0.2, Z0.1	nm
Closed-loop linearity		X0.3, Z1	-	%F.S.
Repeatability		0.25	-	%F.S.
Pitch/yaw/roll		<15	<15	μrad
Unloaded resonant frequency		X2/Z1	X2/Z1	kHz $\pm 20\%$
Unloaded Step time		8	0.5	ms $\pm 20\%$
Load capacity		0.5	0.5	kg
El. capacitance		X1.8, Z0.8	X1.8, Z0.8	$\mu\text{F} \pm 20\%$
Operating temperature ^[1]		-20~80	-20~80	$^{\circ}\text{C}$
Material		Aluminum	Aluminum	
Size(L×W×H)		40×40×33	40×40×33	mm
Cable length ^[2]		1.5	1.5	m $\pm 10\text{mm}$
Sensor/voltage connector ^[2]		-	-	




Note: Max driving voltage could be -20V~150V, 0~120V is recommended for long-term and high-reliable operation. Unless otherwise specified, the above parameters are measured at room temperature about 25°C.

[1] Custom ultralow temperature and ultrahigh vacuum versions are available.

[2] Custom cable length and connector is available.

Note: The parallelism of the moving platform is about 20 μm , and the roughness is about 1.6 to 3.2. Please contact the sales engineer for confirmation before purchase.


Curves >>

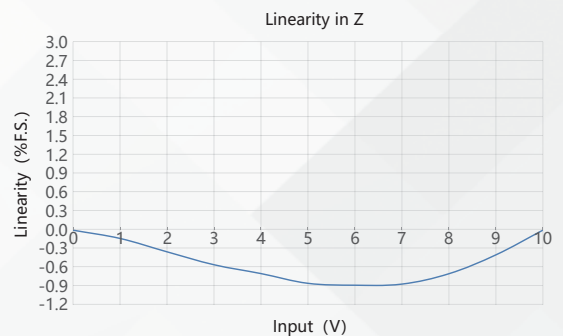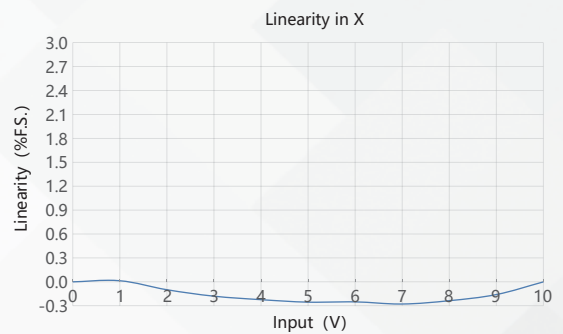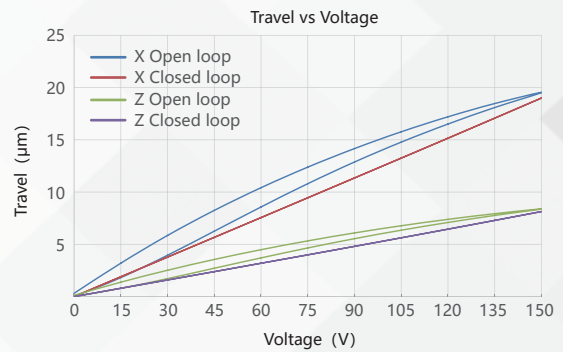

Disclaimer: The data here are typical, only for reference. Some variations will occur for different batch.

Drawing >>

Type	L(mm)
P63.X18Z8	33

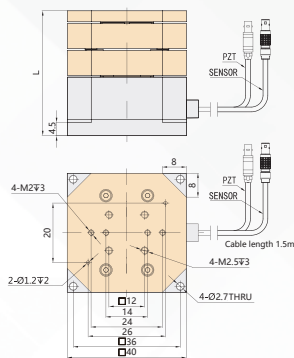

Recommended Controllers >>



E01.D3
 LCD, membrane button, up to 625mA
 RS-232/RS-422/USB interface
 Software secondary development



E70
 Small size, ave current 70mA/channel
 RS-232/RS-422/USB interface
 Software secondary development



Harbin Core Tomorrow Science & Technology Co., Ltd.

Tel: +86-451-86268790 Email: info@coremorrow.com
 Fax: +86-451-86267847 Web: www.coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin
 Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai