

X axis | P63.X18S/K

Piezo Nanopositioning Stage



Characteristics >>

- Active axes X
- Travel range to 18 μ m
- Max load to 0.5kg
- Fast response time
- Open/closed loop

Applications >>

- Metering
- Nanometer positioning
- semiconductor technology
- Micro machining/precision control
- Interference / scanning
- CD disc test
- Quality assurance testing

Introduction

P63.X18S/K is small-size X motion piezo nanopositioning stage with direct drive mechanism inside. Its important characteristics are ultra-precision and very small size, which is very easy to integrate into any scanning instrument.



Harbin Core Tomorrow Science & Technology Co., Ltd.

Tel: +86-451-86268790

Email: info@coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin

Fax: +86-451-86267847

Web: www.coremorrow.com

Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai

Technical Data >>

Type	S-Closed loop K-Open loop	P63.X18S	P63.X18K	Units
Active axis		X	X	
Travel range(0~120V)		16	16	$\mu\text{m}\pm 10\%$
Travel range(0~150V)		18	18	$\mu\text{m}\pm 10\%$
Sensor		SGS	-	
Resolution		0.6	0.2	nm
Closed-loop linearity		0.3	-	%F.S.
Repeatability		0.25	-	%F.S.
Pitch/yaw/roll		<15	<15	μrad
Unloaded resonant frequency		2	2	$\text{kHz}\pm 20\%$
Unloaded Step time		8	0.5	$\text{ms}\pm 20\%$
Load capacity		0.5	0.5	kg
El. capacitance		1.8	1.8	$\mu\text{F}\pm 20\%$
Operating temperature ^[1]		-20~80	-20~80	$^{\circ}\text{C}$
Material		Aluminum	Aluminum	
Size(L×W×H)		40×40×21	40×40×21	mm
Cable length ^[2]		1.5	1.5	$\text{m}\pm 10\text{mm}$
Sensor/voltage connector ^[2]		-	-	



Note: Max driving voltage could be -20V~150V, 0~120V is recommended for long-term and high-reliable operation. Unless otherwise specified, the above parameters are measured at room temperature about 25° C.

[1] Custom ultralow temperature and ultrahigh vacuum versions are available.

[2] Custom cable length and connector is available.

Note: The parallelism of the moving platform is about 20 μm , and the roughness is about 1.6 to 3.2. Please contact the sales engineer for confirmation before purchase.


Curves >>

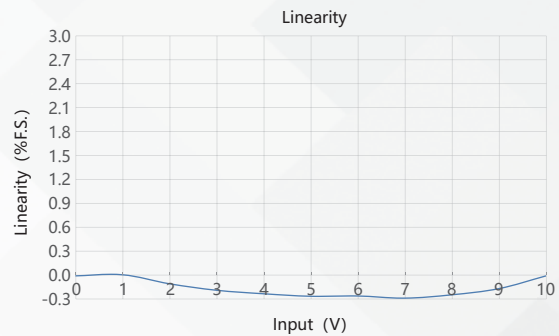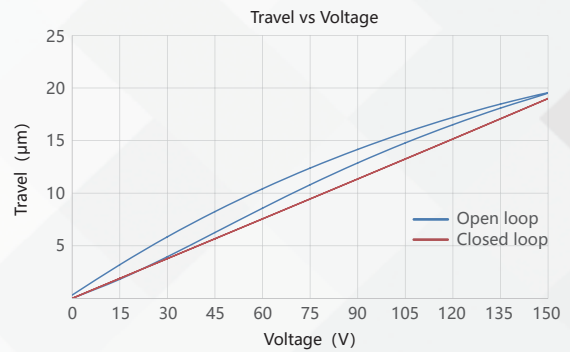

Disclaimer: The data here are typical, only for reference. Some variations will occur for different batch.

Drawing >>

Type	L(mm)
P63.X18	21

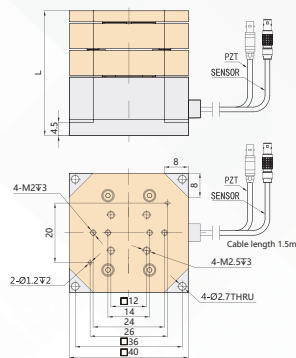

Recommended Controllers >>



E01.D1
LCD, membrane button, up to 625mA
RS-232/RS-422/USB interface
Software secondary development



E53
Small size, 60mA
RS-232/RS-422/USB interface
Software secondary development



Harbin Core Tomorrow Science & Technology Co., Ltd.

Tel: +86-451-86268790 Email: info@coremorrow.com
Fax: +86-451-86267847 Web: www.coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin
Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai