


X axis | P66.X30S/K

Piezo Nanopositioning Stage

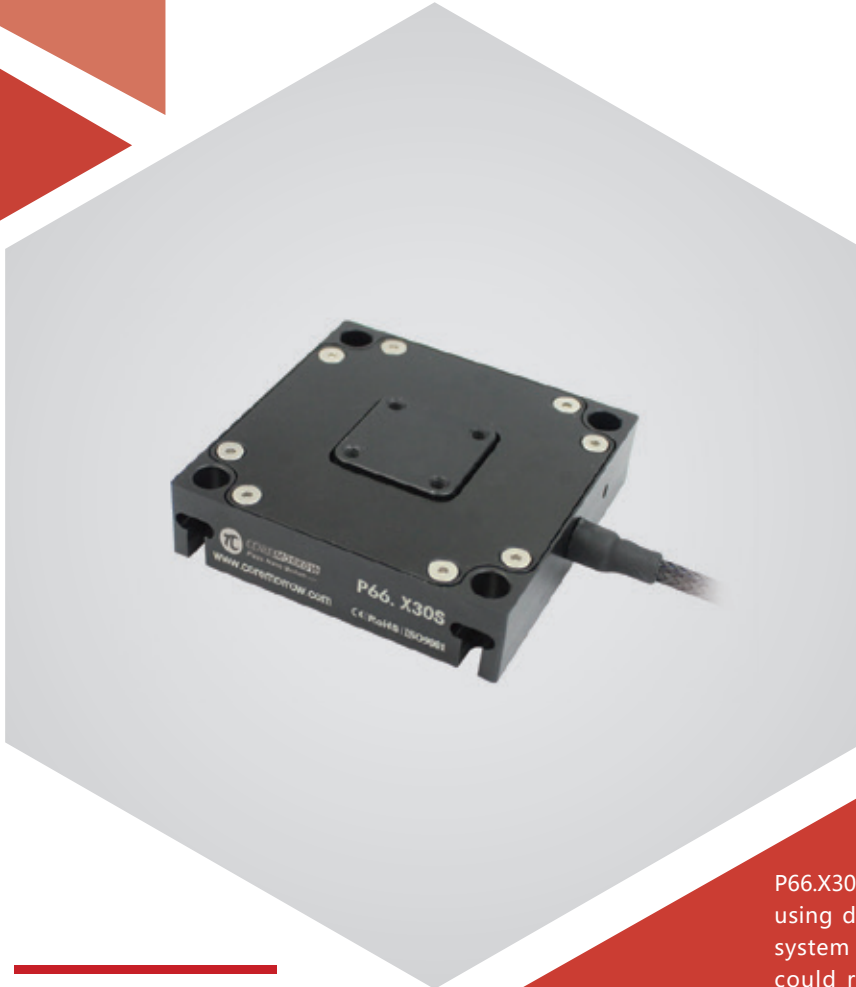

Characteristics >>

- Active axes X
- Travel range to 30 μ m
- Max load to 8kg
- Fast response time
- Open/closed loop

Applications >>

- Metering
- Nanometer positioning
- semiconductor technology
- Micro machining/precision control
- Interference / scanning
- CD disc test
- Quality assurance testing

Introduction

P66.X30 is a piezo nanopositioning stage with X motion using direct-drive mechanism. It is nanopositioning system combining piezo and flexible hinges, which could reach millisecond response time, sub-nano accuracy, and optional highprecision sensors for closed-loop control. It is ideal for positioning applications such as optical path length correction in interference, sample positioning in microscopy or scanning applications, etc.



Harbin Core Tomorrow Science & Technology Co., Ltd.

Tel: +86-451-86268790 Email: info@coremorrow.com
Fax: +86-451-86267847 Web: www.coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin
Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai

Technical Data >>

Type	S-Closed loop K-Open loop	P66.X30S	P66.X30K	Units
Active axis		X	X	
Travel range(0~120V)		24	24	μm±10%
Travel range(0~150V)		30	30	μm±10%
Sensor		SGS	-	
Resolution		1	0.5	nm
Closed-loop linearity		0.1	-	%F.S.
Repeatability		0.05	-	%F.S.
Pitch/yaw/roll		<15	<15	μrad
Push/pull force capacity		120/15	120/15	N
Stiffness		4.4	4.4	N/μm±20%
Unloaded resonant frequency		5	5	kHz±20%
Unloaded step time		5	0.8	ms±20%
Closed-loop operating frequency (-3dB)		600 (unloaded)	600 (unloaded)	Hz±20%
Load capacity		8	8	kg
El. capacitance		3.6	3.6	μF±20%
Operating temperature ^[1]		-20~80	-20~80	°C
Material		Aluminum	Aluminum	
Size(L×W×H)		60×60×16	60×60×16	mm
Mass		120	120	g±5%
Cable length ^[2]		1.5	1.5	m±10mm
Sensor/voltage connector ^[2]		-	-	


Note: Max driving voltage could be -20V~150V, 0~120V is recommended for long-term and high-reliable operation. Unless otherwise specified, the above parameters are measured at room temperature about 25° C.

[1] Custom ultralow temperature and ultrahigh vacuum versions are available.




[2] Custom cable length and connector is available.

Note: The parallelism of the moving platform is about 20μm, and the roughness is about 1.6 to 3.2. Please contact the sales engineer for confirmation before purchase.

Drawing >>

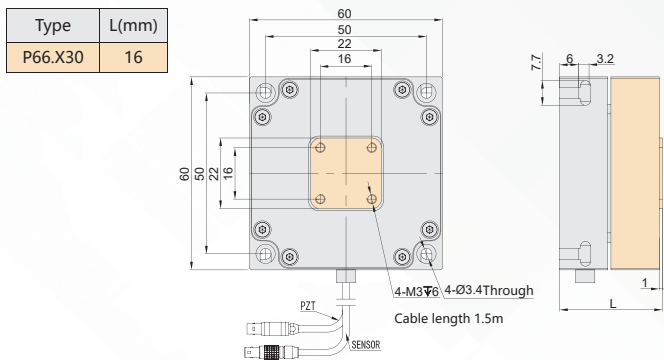

Curves >>

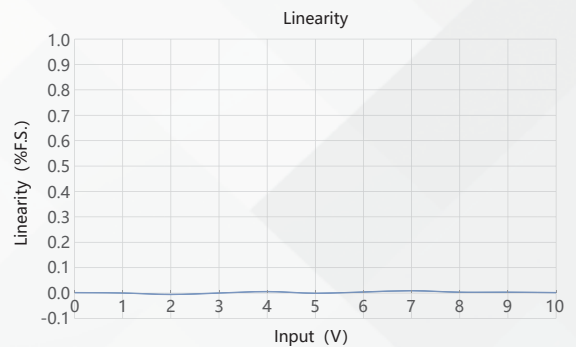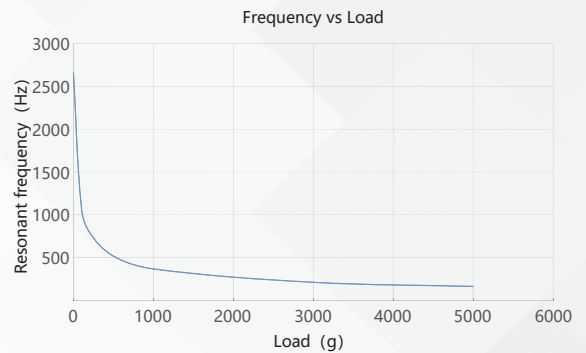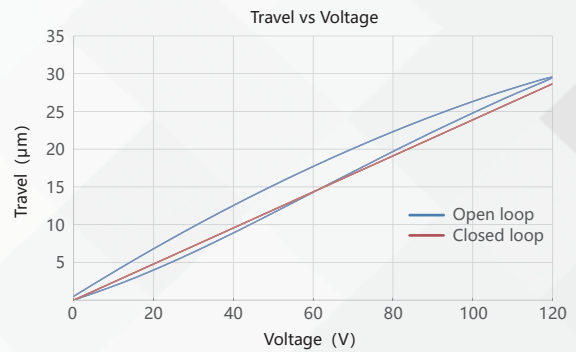

Disclaimer: The data here are typical, only for reference. Some variations will occur for different batch.

Recommended Controllers >>



E01.D1
LCD, membrane button, up to 625mA
RS-232/RS-422/USB interface
Software secondary development



E53
Small size, 60mA
RS-232/RS-422/USB interface
Software secondary development



Harbin Core Tomorrow Science & Technology Co., Ltd.

Tel: +86-451-86268790 Email: info@coremorrow.com
Fax: +86-451-86267847 Web: www.coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin
Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai