


# Z axis | P77.S/K106

## Piezo Phase Shifter

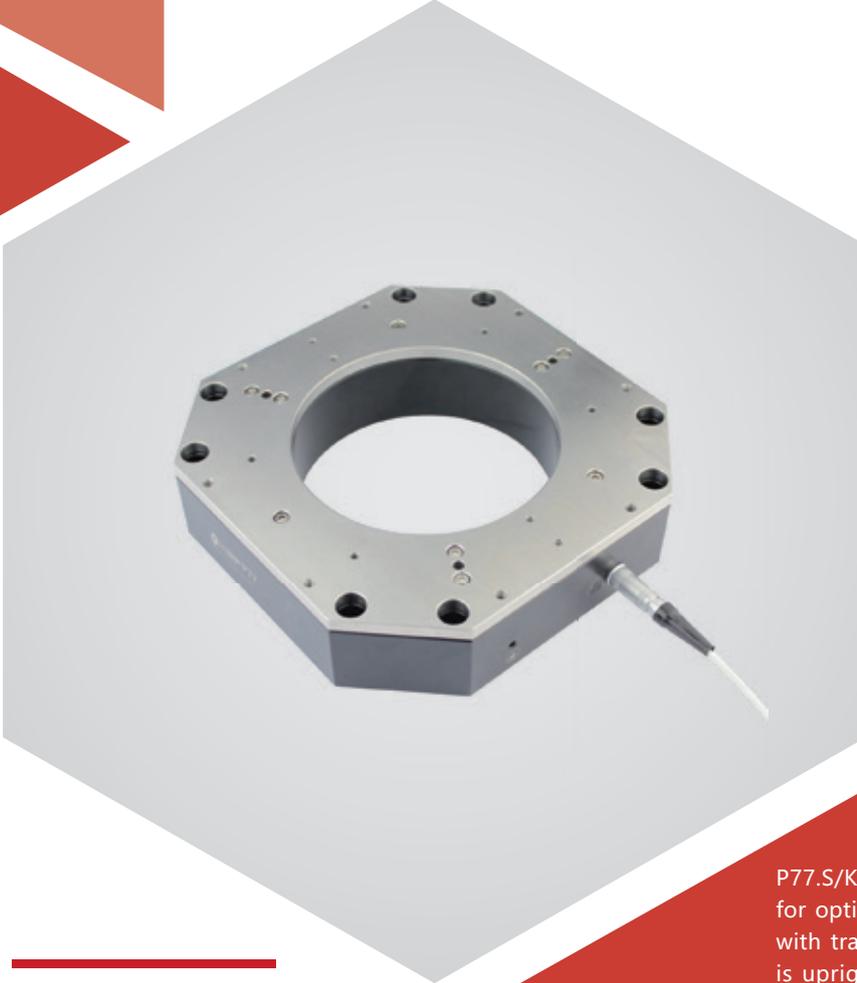

### Characteristics >>

- Active axes Z
- Stroke to 17.5 $\mu$ m
- Max load to 15kg
- Aperture size:  $\Phi$ 106mm
- Custom versions are available

### Applications >>

- Optical trapping
- Surface inspection
- Precision positioning
- Microscopic imaging
- Phase shifter
- Phase shifting/interference/metering

## Introduction

P77.S/K106 piezo phase shifter is specially designed for optical detection and phase shifting applications, with travel range of up to 17.5 $\mu$ m and load capacity is upright 15kg, lateral 5kg, inverted 10kg, which is very suitable for large-aperture optical inspection equipment, like laser interferometer, for various lenses. Custom versions are available.



**Harbin Core Tomorrow Science & Technology Co., Ltd.**

Tel: +86-451-86268790    Email: info@coremorrow.com  
Fax: +86-451-86267847    Web: www.coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin  
Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai

## Technical Data >>

Type	S-Closed loop K-Open loop	P77.S106	P77.K106	Units
Active axis		Z	Z	
Travel range(0~120V)		14	14	μm±10%
Travel range(0~150V)		17.5	17.5	μm±10%
Sensor		SGS	-	
Aperture		Φ106	Φ106	mm
Resolution		0.5	0.2	nm
Pitch/yaw/roll		<10		μrad
Push/pull force capacity		100/20		N
Unloaded resonant frequency		300		Hz±20%
Unloaded Step time		5	2.5	ms±20%
Load capacity		upright 15, lateral 5, inverted 10		kg
El. capacitance		5.4		μF±20%
Operating temperature <sup>[1]</sup>		-20~80		°C
Material		Aluminum		
Size(L×W×H)		170×170×33		mm
Mass		1600		g±5%
Cable length <sup>[2]</sup>		1.5		m±10mm
Sensor/voltage connector <sup>[2]</sup>		LEMO		


Note: Max driving voltage could be -20V~150V, 0~120V is recommended for long-term and high-reliable operation. Unless otherwise specified, the above parameters are measured at room temperature about 25° C.

[1] Custom ultralow temperature and ultrahigh vacuum versions are available.




[2] Custom cable length and connector is available.

Note: The parallelism of the moving platform is about 20μm, and the roughness is about 1.6 to 3.2. Please contact the sales engineer for confirmation before purchase.

## Drawing >>

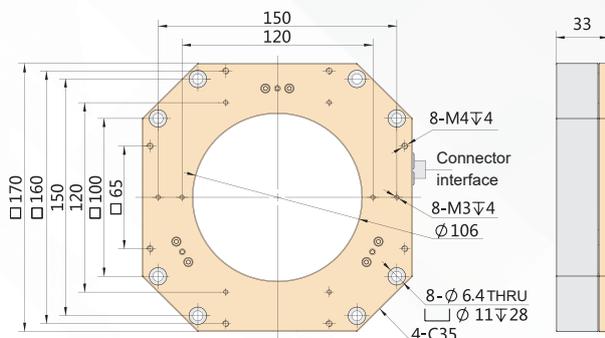

## Curves >>

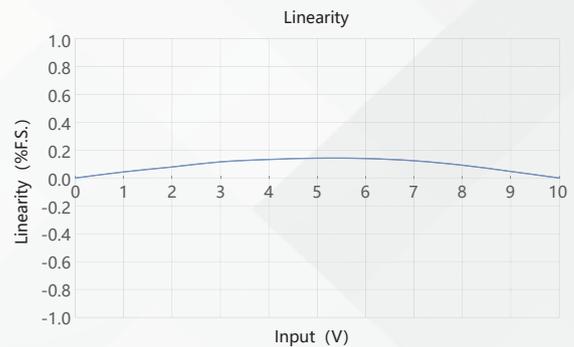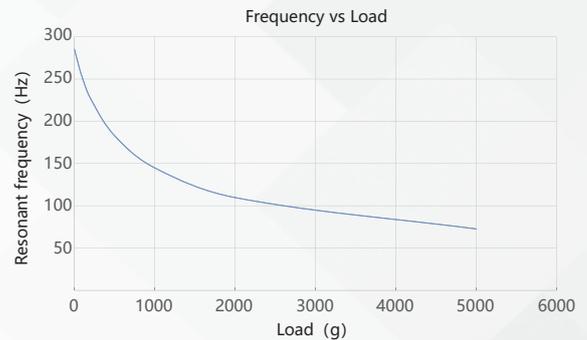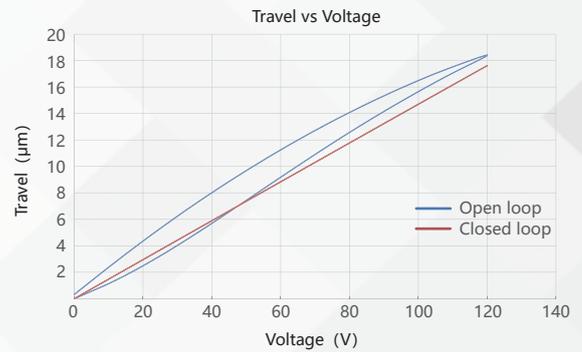

Disclaimer: The data here are typical, only for reference. Some variations will occur for different batch.

## Recommended Controllers >>



**E01.D1**  
LCD, membrane button, up to 625mA  
RS-232/RS-422/USB interface  
Software secondary development



**E53**  
Small size, 60mA  
RS-232/RS-422/USB interface  
Software secondary development



Harbin Core Tomorrow Science & Technology Co., Ltd.

Tel: +86-451-86268790 Email: info@coremorrow.com

Fax: +86-451-86267847 Web: www.coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin

Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai