


Z axis | P79.Z200S/K

Piezo Z Microscope Scanner

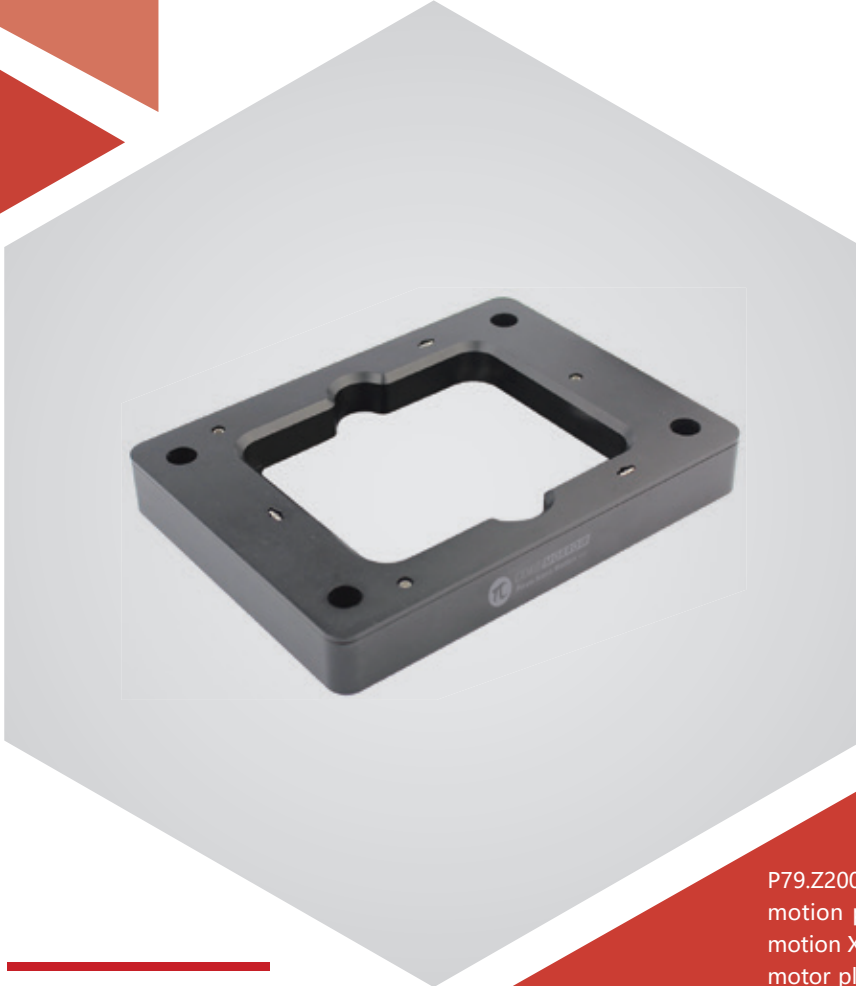

Characteristics >>

- Active axes Z
- Max stroke to 187.5 μ m
- Load to 1.5kg
- Aperture size: 83 \times 65mm
- High closed-loop repeatability

Applications >>

- Fluorescence/confocal microscopy
- Confocal microscopy
- Biotechnology
- Autofocus system
- Sample detection
- 3D imaging
- Semiconductor test

Introduction

P79.Z200 piezo Z microscope scanner is a Z-axis micro-motion platform, mainly used for supporting macro-motion XY-axis micro-scanning stages and piezoelectric motor platforms on the market. P79.Z200 platform can perform fast Z-axis focus adjustments with milliseconds step time.



Harbin Core Tomorrow Science & Technology Co., Ltd.

Tel: +86-451-86268790

Email: info@coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin

Fax: +86-451-86267847

Web: www.coremorrow.com

Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai

Technical Data >>

Type	S-Closed loop K-Open loop	P79.Z200S	P79.Z200K	Units
Active axis		Z	Z	
Travel range(0~120V)		150	150	$\mu\text{m}\pm 20\%$
Travel range(0~150V)		187.5	187.5	$\mu\text{m}\pm 20\%$
Sensor		SGS	-	
Aperture		83×65	83×65	mm
Resolution		5	1.5	nm
Closed-loop linearity		0.15	-	%F.S.
Repeatability		0.1	-	%F.S.
Pitch/yaw/roll		<20	<20	μrad
Push/pull force capacity		42/18	42/18	N
Stiffness		0.2	0.2	$\text{N}/\mu\text{m}\pm 20\%$
Unloaded resonant frequency		150	150	$\text{Hz}\pm 20\%$
Unloaded Step time		25	5	$\text{ms}\pm 20\%$
Load capacity		1.5	1.5	kg
El. capacitance		19.2	19.2	$\mu\text{F}\pm 20\%$
Operating temperature ^[1]		-20~80	-20~80	°C
Material		Steel, Al	Steel, Al	
Size(L×W×H)		160×110×20	160×110×20	mm
Mass		800	800	$\text{g}\pm 5\%$
Cable length ^[2]		1.5	1.5	$\text{m}\pm 10\text{mm}$
Sensor/voltage connector ^[2]		-	-	


Note: Max driving voltage could be -20V~150V, 0~120V is recommended for long-term and high-reliable operation. Unless otherwise specified, the above parameters are measured at room temperature about 25° C.

[1] Custom ultralow temperature and ultrahigh vacuum versions are available.




[2] Custom cable length and connector is available.

Note: The parallelism of the moving platform is about 20 μm , and the roughness is about 1.6 to 3.2. Please contact the sales engineer for confirmation before purchase.

Drawing >>

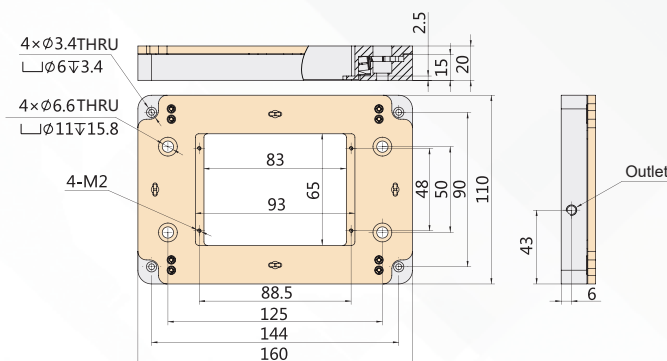

Curves >>

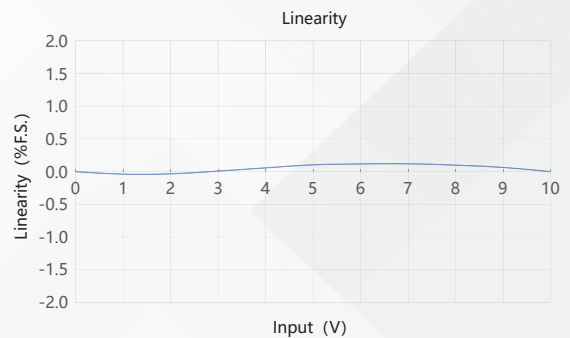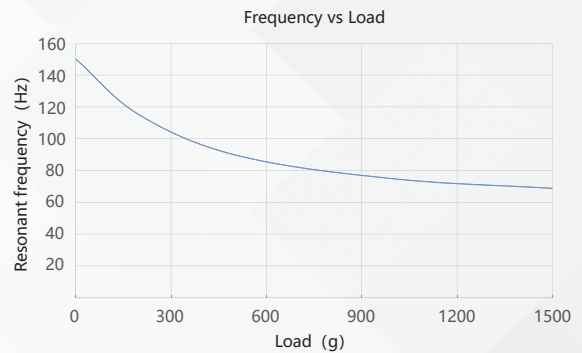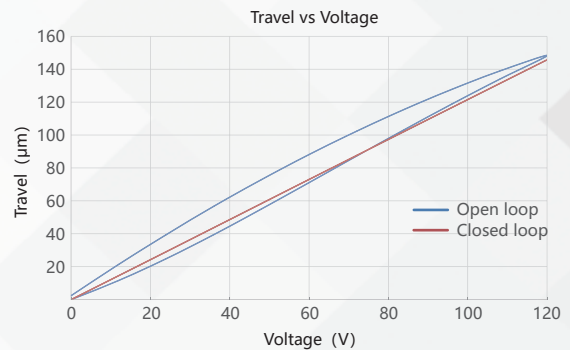

Disclaimer: The data here are typical, only for reference. Some variations will occur for different batch.

Recommended Controllers >>



E01.D1
LCD, membrane button, up to 625mA
RS-232/RS-422/USB interface
Software secondary development



E53
Small size, 60mA
RS-232/RS-422/USB interface
Software secondary development



Harbin Core Tomorrow Science & Technology Co., Ltd.

Tel: +86-451-86268790 Email: info@coremorrow.com
Fax: +86-451-86267847 Web: www.coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin
Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai