

# X axis | X65N81K26

## Piezo Motor Driven Platform



## Introduction

X65N81K26 is a combined motion platform driven by piezo screws, suitable for mm large stroke position adjustment.

### Characteristics >>

- Motion in X
- Travel to 25.4mm
- Optional vacuum version
- Custom closed-loop version is available

### Applications >>

- Precise positioning
- Position scanning
- Microscopy
- Optical path adjustment



**Harbin Core Tomorrow Science & Technology Co., Ltd.**

Tel: +86-451-86268790    Email: [info@coremorrow.com](mailto:info@coremorrow.com)  
Fax: +86-451-86267847    Web: [www.coremorrow.com](http://www.coremorrow.com)

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin  
Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai


## Technical Data >>

Type		X65N81K26	Units
Active axes		X	
Travel range		25.4	mm±20%
Minimum step		<30	nm
Center load	Upright	50	N
	Lateral	20	
Bearing		Ball	
Operating temperature <sup>[1]</sup>		10~40	°C
Port		4-Pin	
Mass		350	g±5%
Material		Aluminum	
Cable length <sup>[1]</sup>		2	m±10mm
Voltage connector <sup>[1]</sup>		RJ11 4P4C	
PZT connector		RJ11	

Note: UHV version is available. Custom closed-loop version is available.

[1]: custom is available.

## Drawing >>

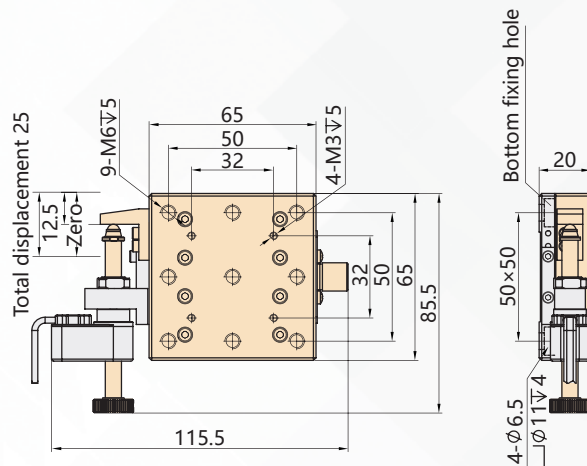

## Recommended Controllers >>



### E53.C4K

4 control interfaces, digital control  
 USB and serial port communication



**Harbin Core Tomorrow Science & Technology Co., Ltd.**

Tel: +86-451-86268790

Email: [info@coremorrow.com](mailto:info@coremorrow.com)

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin

Fax: +86-451-86267847

Web: [www.coremorrow.com](http://www.coremorrow.com)

Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai